



PALOMAT® Double Up

Fully automatic stacking and destacking


Insert or remove the pallets using a hand pallet truck, electric stacker, or a forklift truck. The PALOMAT® Double Up detects the pallets via photo sensors after which they are automatically stacked or destacked 1+1 pallet in a line at floor level.

When selecting destacking, a stack of no more than 2x15 pallets will be inserted in the PALOMAT®, after which the pallets are automatically destacked one by one. When selecting stacking, the pallets are inserted

one by one, after which the pallets are automatically stacked to no more than 2x15 pallets. The entire stack can subsequently be removed.

PALOMAT® Double Up is only operated manually using the touch panel to change between stacking and destacking.

Please notice that the PALOMAT® Double Up only handles 1+1 pallet two in a line - not pallets one by one. This applies for stacking as well as destacking.

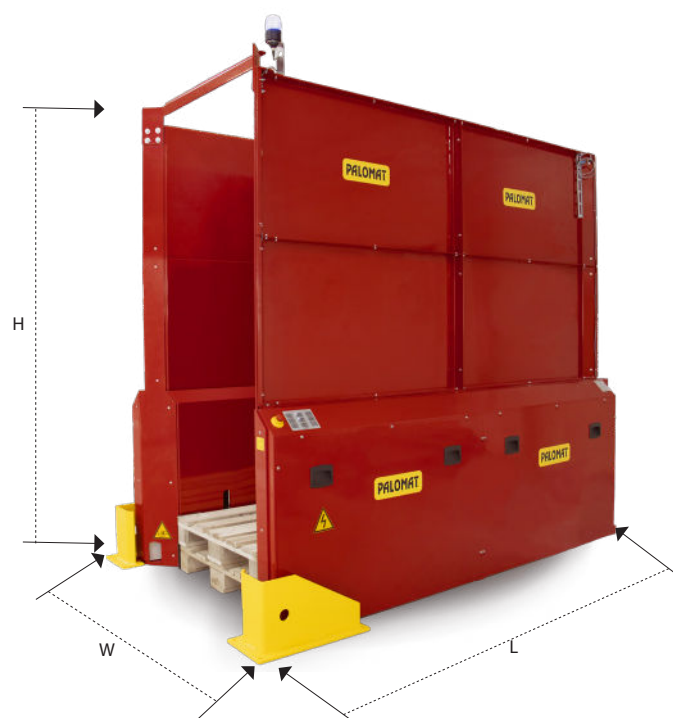

Your benefits with PALOMAT®

- › Space saving and a tidy workplace
- › Optimised pallet flow
- › Improved work environment
- › Reduced pallet costs
- › Increased efficiency
- › No manual pallet handling
- › Less absence due to illness
- › Reduced time spent per pallet
- › Fewer back injuries, jammed fingers, and feet
- › Less truck driving
- › LEAN- increased efficiency with less resources
- › "Plug and Play" solution



Models				
Article no.	Machine dimensions L x W x H (mm)	Pallet size L x W x H (mm)	Lifting capacity (kg)	No. of pallets
152501*	2720x1340x2350	2x1200x800x144	2x500	2x15

* Incl. safety frame for 2x15 pallets, top bar, light tower incl. maximum indicator and truck protection

Technical
Power source
220-240V AC, 50 Hz

Control: Siemens S7-1200
Actuator: Linak



Standard colours: RAL 3002 red, RAL 5002 blue, RAL 7032 grey and RAL 7035 grey

You can read more about PALOMAT® Double Up, options, technical data etc. on www.palomat.com